

DUMPS ARENA

Developing Applications for Cisco Webex and Webex Devices (DEVWBX)

Cisco 300-920

Version Demo

Total Demo Questions: 10

Total Premium Questions: 62

Buy Premium PDF

<https://dumpsarena.com>

sales@dumpsarena.com

dumpsarena.com

Topic Break Down

Topic	No. of Questions
Topic 1, Webex API Foundation	13
Topic 2, Meetings	13
Topic 3, Devices	12
Topic 4, Messaging	8
Topic 5, Embedding Webex	11
Topic 6, Administration and Compliance	5
Total	62

QUESTION NO: 1

```
{
  "message": "The user has sent too many requests in a given amount of time. Please refer to the
Retry-After response header to wait before making a new request.",
  "errors": [
    {
      "description" : "The user has sent too many requests in a given amount of time. Please
refer to the Retry-After response header to wait before making a new request."
    }
  ],
  "trackingId": "ROUTER_5D224C5A-C32B-01BB-007E-2D30B4D4007E"
}
```

Refer to the exhibit. What is the Webex Teams REST API HTTP response status code, based on this code snippet?

- A. 401
- B. 403
- C. 429
- D. 501

ANSWER: C**Explanation:**

Reference: <https://developer.webex.com/docs/api/v1/messages/get-message-details>

QUESTION NO: 2

Which two statements about incoming WebEx call notifications on iOS and Android applications are true? (Choose two.)

- A. When running in the background on Android, Firebase Cloud Messaging must use a notification message.
- B. When running in the background on Android, Firebase Cloud Messaging must use a data message.
- C. Webhooks are required with the iOS SDK only when the application is in the background.
- D. When running in the background on iOS, Application Push Notifications must be configured to be silent.
- E. Webhooks are required in the foreground and background for iOS and Android applications.

ANSWER: B C**Explanation:**

Reference:

<https://github.com/webex/webex-android-sdk-example-push-notification-server/blob/master/README.md>
<https://developer.webex.com/docs/sdks/ios>

QUESTION NO: 3

```
const Webex = require('webex');  
  
const webex = Webex.init({  
  credentials: {  
    access_token: 'A_VALID_ACCESS_TOKEN'  
  }  
});
```

Refer to the exhibit. When using the Webex Browser SDK to create calls and share screens, which two statements are valid given a 'webex' object such as displayed in the exhibit? (Choose two.)

- A. After a meeting is joined, it cannot be left programmatically until the host ends the meeting.
- B. The webex meetings.register() function must be invoked before attempting to join any meeting.
- C. The joinMeeting() function throws an error of type 'media stopped' if a media stream is stopped.
- D. Given a Webex meeting number the webex meetings join() function can be used to join the meeting.
- E. The mediaSettings for a joined meeting accepts boolean attributes to send and receive audio, video, and screen share.

ANSWER: A B

Explanation:

Reference: <https://developer.webex.com/docs/sdks/browser>

QUESTION NO: 4

With CE 9.8 and above, which two statements are correct when an application is sending and receiving data over a connection established with an xAPI interface? (Choose two.)

- A. All Serial, SSH, and WebSockets can be used to send and receive data.
- B. HttpClient can be used to send requests but not receive responses.
- C. HttpFeedback is the only option to receive data.
- D. The HttpClient command can be used to send requests and read responses over HTTP.

E. WebSockets is the only option to send and receive data.

ANSWER: B D

Explanation:

Reference: <https://www.cisco.com/c/dam/en/us/td/docs/telepresence/endpoint/ce98/sx-mx-dx-room-kit-boards-customization-guide-ce98.pdf>

QUESTION NO: 5

```
{
  "items":
  {
    "id": "Y21zY29zcGFyazovL3VzL1LWT4Y2UtMTEzZjZjZmMxNGJl",
    "title": "DevNet Dev Support Questions",
    "lastActivity" : "2019-12-13T21:32:11.424Z",
    "created": "2016-01-22T19:07:24.785Z",
    ...
  },
  {
    "id": "Y21zY29zcGFyazovL3VzWU1LWT0ZjZmJmMjI3Y2ZmYWYz",
    "title": "DevNet Program Questions",
    "lastActivity" : "2019-12-13T16:53:14.920Z",
    "created": "2016-02-24T18:52:35.013Z",
    ...
  }
}
```

Refer to the exhibit. Which Webex Teams REST API request has generated the response body in the exhibit?

- A. GET/v1/rooms?sortBy=lastactivity
- B. GET/v1/rooms?sortBy=created
- C. GET/v1/rooms?max=1
- D. GET/v1/spaces?orderBy=lastActivity

ANSWER: C

Explanation:

Reference: <https://developer.webex.com/docs/api/v1/rooms/list-rooms>

QUESTION NO: 6 - (DRAG DROP)

DRAG DROP

Drag and drop the components to create the authentication header used for the Webex Teams API. Not all options are used.

Select and Place:

<input type="text"/>	:	<input type="text"/>	<input type="text"/>
----------------------	---	----------------------	----------------------

admin:Password12345l	Authorization
Token	Bearer
BH782kjh-2jkhmnb3rlkj3llkjm3klj3	Authentication
Basic	

ANSWER:

Authorization	:	Bearer	Token
---------------	---	--------	-------

admin:Password12345l	Authorization
Token	Bearer
BH782kjh-2jkhmnb3rlkj3llkjm3klj3	Authentication
Basic	

Explanation:

Reference: <https://developer.webex.com/docs/guest-issuer>

QUESTION NO: 7

Which two filters are valid for limiting a webhook? (Choose two.)

A. roomId=**B.** personId=

- C. spaceld=
- D. personId=\$spaceld=
- E. personId=\$roomId=

ANSWER: A B

Explanation:

Reference: <https://developer.webex.com/docs/api/guides/webhooks>

QUESTION NO: 8

```
1  const jsxapi = require('jsxapi');
2  const speaker = require('./speaker')
3  const xapi = jsxapi.connect('ssh://10.131.202.230', {
4      username: 'admin',
5      password: ''
6  });
7  let state = 0
8  function toggle(state) {
9      if (state === 0) {return 1}
10     else {return 0}
11 }
12 xapi.on('ready', () => {
13     xapi.event
14     .on('_____', (x) => {
15         if (x.PanelId === 'panel_1') {
16             state = toggle(state)
17             if (state === 1) {
18                 speaker.control({"on": true});
19             } else {
20                 speaker.control({"on": false})
21             }
22         }
23     })
24 });
```

Refer to the exhibit. An 'Action Button' with identifier 'panel_1' is deployed to the Touch10 interface of a Room Series device. Which event must be inserted into line 14 to turn the music on/off in the conference room?

- A. UserInterface Extensions Event Pressed

- B. UserInterface Extensions Panel Clicked
- C. UserInterface Extensions Widget GetValue
- D. UserInterface Extensions Widget Action

ANSWER: A

Explanation:

Reference: <https://www.cisco.com/c/dam/en/us/td/docs/telepresence/endpoint/ce81/sx-mx-in-room-control-guide-ce81.pdf>

QUESTION NO: 9 - (DRAG DROP)

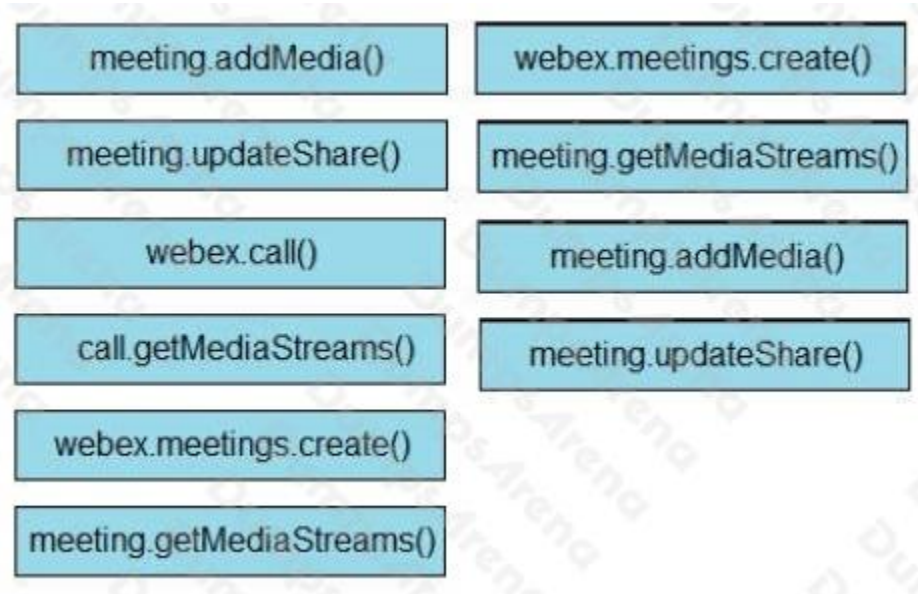
DRAG DROP

Drag and drop the methods from the left into the correct order of execution on the right to use webex-js-sdk in a browser to call and share the screen with another Webex user. Not all methods are used.

Select and Place:

meeting.addMedia()	step 1
meeting.updateShare()	step 2
webex.call()	step 3
call.getMediaStreams()	step 4
webex.meetings.create()	
meeting.getMediaStreams()	

ANSWER:

**Explanation:**

Reference: https://github.com/webex/webex-js-sdk/blob/master/packages/node_modules/%40webex/plugin-meetings/README.md (see start wireless share)

QUESTION NO: 10

Which user role implicitly has permission in the Events API to retrieve “message created” events from other users in the same organization?

- A. Compliance Officer
- B. User and Device Administrator
- C. Full Administrator
- D. User Administrator

ANSWER: A**Explanation:**

Reference: <https://developer.webex.com/docs/api/guides/compliance>